

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 December 2004 (23.12.2004)


PCT

(10) International Publication Number
WO 2004/110317 A1

- (51) International Patent Classification⁷: **A61F 2/30**
- (21) International Application Number: **PCT/DK2004/000412**
- (22) International Filing Date: **14 June 2004 (14.06.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
PA 2003 00894 17 June 2003 (17.06.2003) DK
- (71) Applicant (for all designated States except US): **HOPRO A/S [DK/DK]; Bredgade 56, 2, DK-1260 Copenhagen K (DK).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HVOLRIS, Jesper [DK/DK]; Lejrevej 23A, DK-4320 Lejre (DK). HANSEN, John, Bøgh [DK/DK]; Solvænget 22, DK-4296 Nyrup (DK).**
- (74) Agent: **PLOUGMANN & VINGTOFT A/S; P.O. Box 831, Sundkrogsgade 9, DK-2100 Copenhagen Ø (DK).**
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): **ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**

[Continued on next page]

(54) Title: **DEVICE FOR PREVENTING DISLOCATION OF HIP ARTHROPLASTY IMPLANTS**

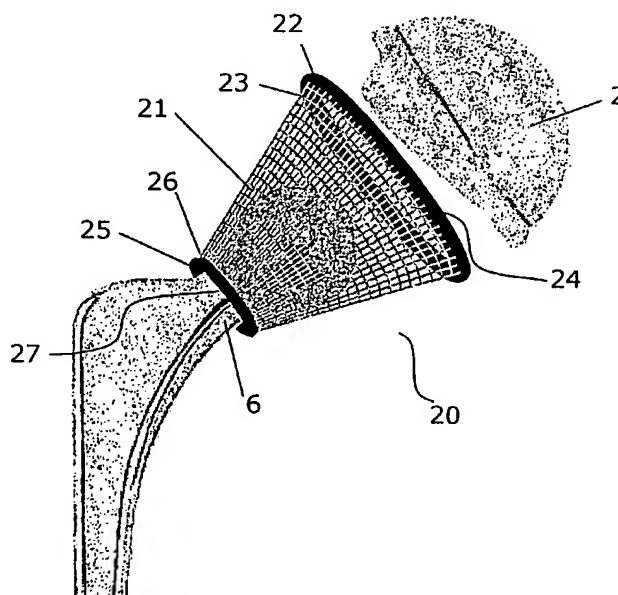

(57) Abstract: The invention relates to a method and an anti-luxation device (20) for preventing dislocation of arthroplasty implants such as in hips. The invention prevents dislocation by providing a restraining force on the implant under all movements of the joint. The device provides a restraining force opposing movements typically leading to positions where dislocations are likely to occur, and an extra securing force for holding the implant head (7) in the cup (2) when the joint is at positions where dislocations are likely to occur. The invention further provides a method for mounting the device on an arthroplasty implant.

WO 2004/110317 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.